

Construction and working characteristics


- Diaphragm pressure regulator with relieving.
- Balanced poppet.
- Lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Wall mounting possibility with M6 screws protected by covers.
- Two pressure gauge connections with plug complete of seal.
- Panel mounting bracket.

Technical characteristics


Connections	G 3/8" - G 1/2"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 550
Pressure range	0 - 2 bar
	0 - 4 bar
	0 - 8 bar
	0 - 12 bar
Assembly position	Any
Wall fixing screws	M6
Max. fitting torque	40 Nm

Flow rate curves

Inlet pressure (7 bar)

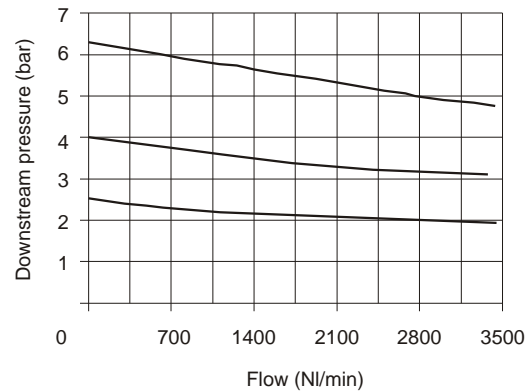


Adjustment characteristics

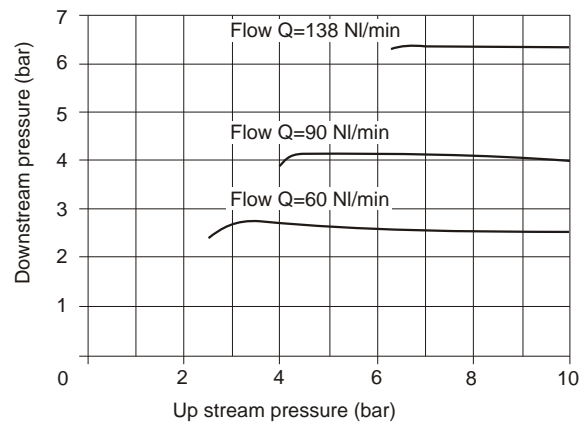


Ordering code

17302

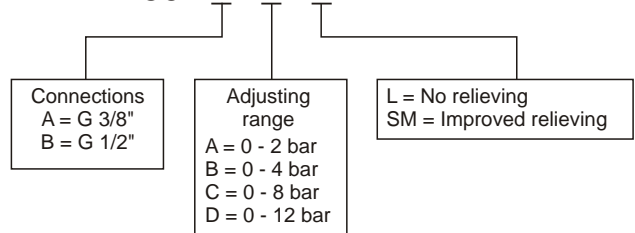

Example: **17302A.C**

Pressure regulator with G 3/8" connections, adjusting range 0 - 8 bar with relieving.

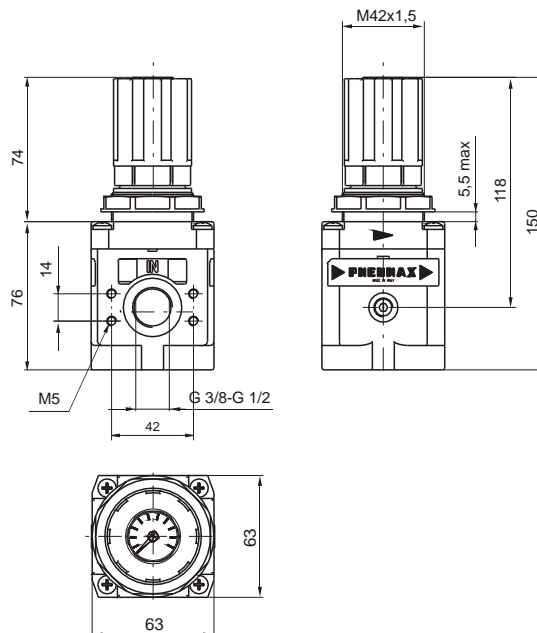


Construction and working characteristics

- Diaphragm pressure regulator with relieving.
- Pressure gauge included on the top of adjusting knob.
- Balanced poppet.
- Lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Panel mounting bracket.


Technical characteristics

Connections	G 3/8" - G 1/2"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 600
Pressure range	0 - 2 bar
	0 - 4 bar
	0 - 8 bar
	0 - 12 bar
Assembly position	Any
Wall fixing screws	M5
Max. fitting torque	40 Nm


Flow rate curves
Inlet pressure (7 bar)

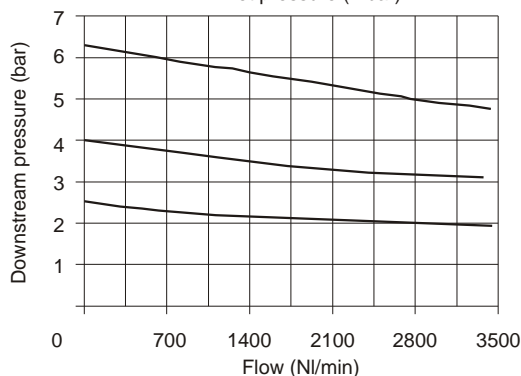

Adjustment characteristics

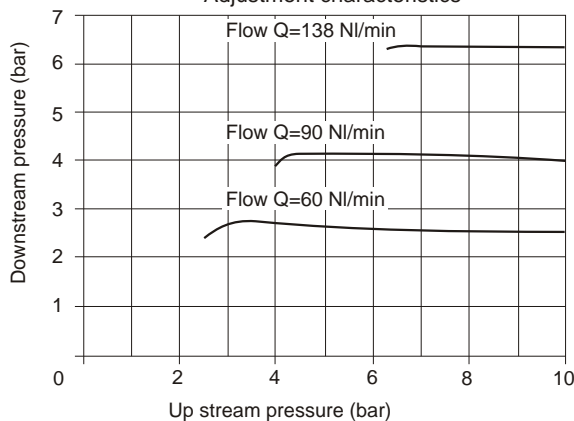

Ordering code

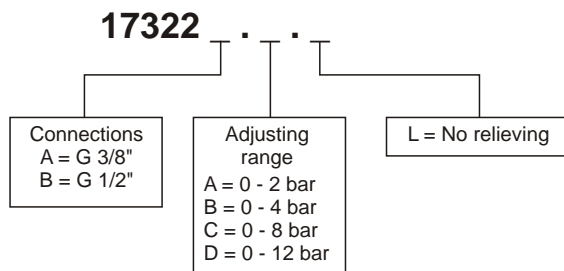

Example: **17322A.C**
Pressure regulator with G 3/8" connections, adjusting range 0 - 8 bar with relieving.