


Construction and working characteristics

- Fog type lubrication with variable section orifice according to the flow.
- Body made with light alloy.
- Wall mounting possibility with M8 screws protected by covers.
- Light alloy bowl c/w level indicator connected to the body with bayonet cap and safety button.
- Transparent technopolymer sight dome with adjusting handle.
- Oil filling plug.

Technical characteristics

Connections	G 1"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 1500
Indicative oil drip rate	1 drop every 300/600 NI
Oil Type	FD22 - Hg32
Bowl capacity	300 cm ³
Assembly position	Vertical
Wall mounting screws	M8
Min. operational flow (at 6,3 bar)	100 NI/min

Flow rate curves
Inlet pressure (bar)

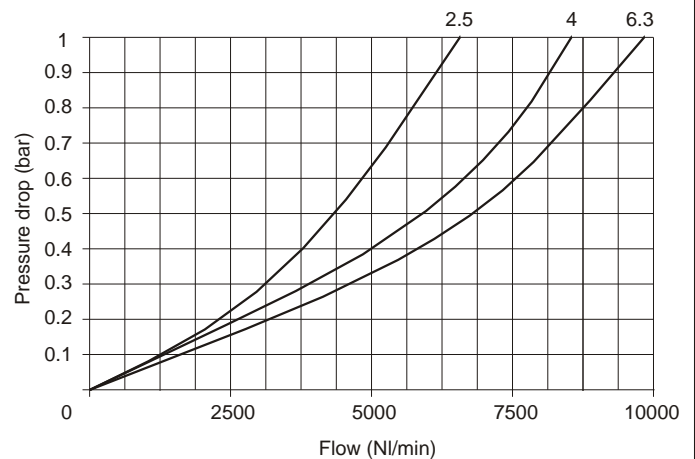

Ordering code

17403

Connections
B = G 1"

MA = Minimum oil level indicator N.O.
with plug connector
MC = Minimum oil level indicator N.C.
with plug connector

Note: on MA version the contact is open when the bowl is filled
on MC version the contact is closed when the bowl is filled

Example: **17403B**
Lubricator with G 1" connections.