


Construction and working characteristics

- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Double filtering action : by air centrifuging and by replaceable and reusable HDPE porous filter element.
- Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Possibility to see the water level on 360°.
- Automatic water drainage bowl available on request.

Technical characteristics


Connections	G 1/4" - G 3/8"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 255
Filter pore size	5 μ
	20 μ
	50 μ
Bowl capacity	28 cm ³
Assembly position	Vertical
Wall fixing screws	M5
Max. fitting torque	25 Nm.

Flow rate curves

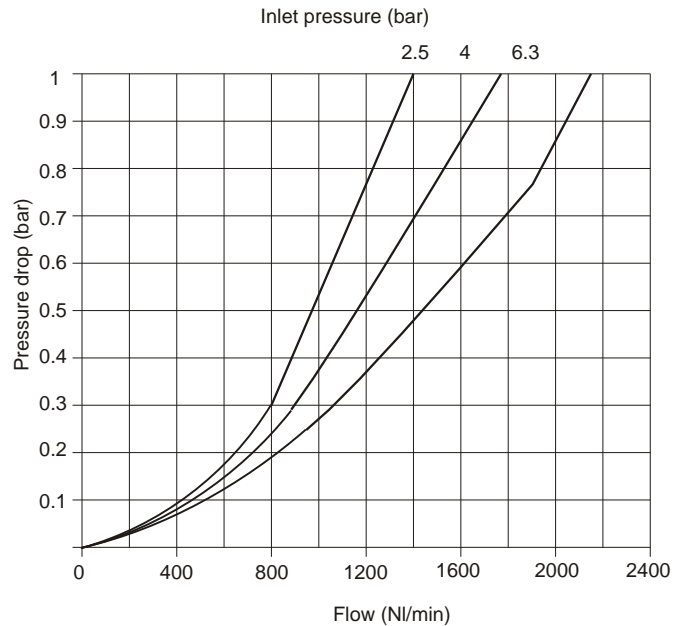


Ordering code

17201

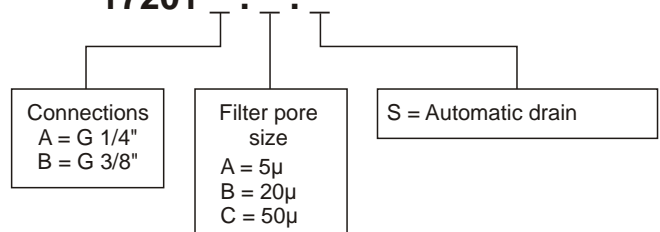

Example: **17201A.B**
Filter size 1 with G 1/8" connections and filter pore size 20 μ .

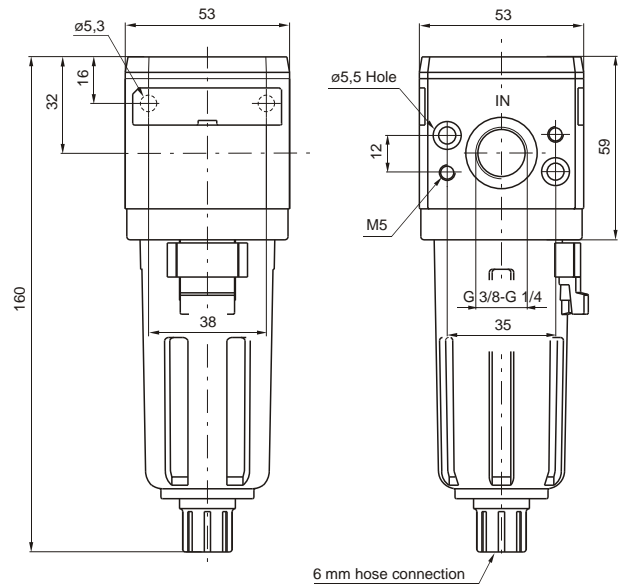


Construction and working characteristics

- Coalescing filter element remove 0,1 μ particles equivalent to 99,97%.
- Body made with light alloy.
- Wall mounting possibility with M5 screw protected by covers.
- Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Possibility to see the water level on 360° also with Bowl protection assembled.
- Automatic water drainage bowl available on request.


Technical characteristics

Connections	G 1/4" - G 3/8"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 255
Filter efficiency with 0,1 μ particle	99,97%
Bowl capacity	28 cm ³
Assembly position	Vertical
Wall fixing screws	M5
Max. fitting torque	25 Nm

Flow rate curves
Inlet pressure (bar)

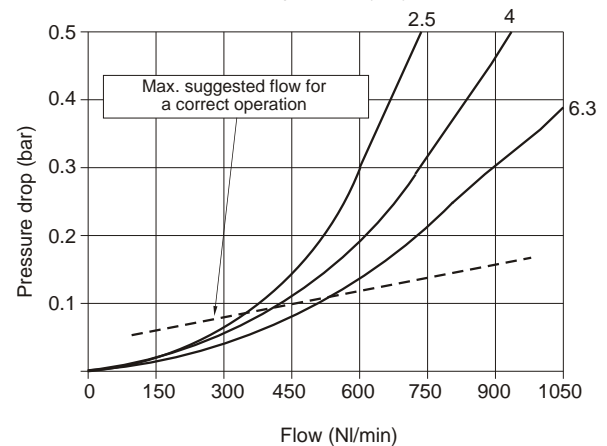

Ordering code

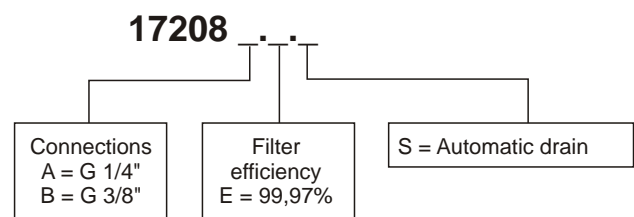

Example: **17208A.E**
Coalescing filter size 2 with G 1/4" connections and filter efficiency of 99,97%.