


Construction and working characteristics

- Fog type lubrication with variable section orifice according to the flow.
- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Transparent technopolymer bowl with shock resistant technopolymer protection
- Possibility to see the min. and max. level on 360° also with bowl protection assembled.
- Bowl assembled to the body with bayonet cap and safety button.
- Transparent technopolymer sight dome with adjusting handle.
- Oil filling plug.

Technical characteristics

Connections	G 1/4" - G 3/8"
Max. inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 280
Indicative oil drip rate	1 drop every 300/600 NI
Oil type	FD22 - HG32
Bowl capacity	50 cm ³
Assembly position	Vertical
Wall mounting screws	M5
Min. operational flow	20 NI/min
Max. fitting torque	25 Nm

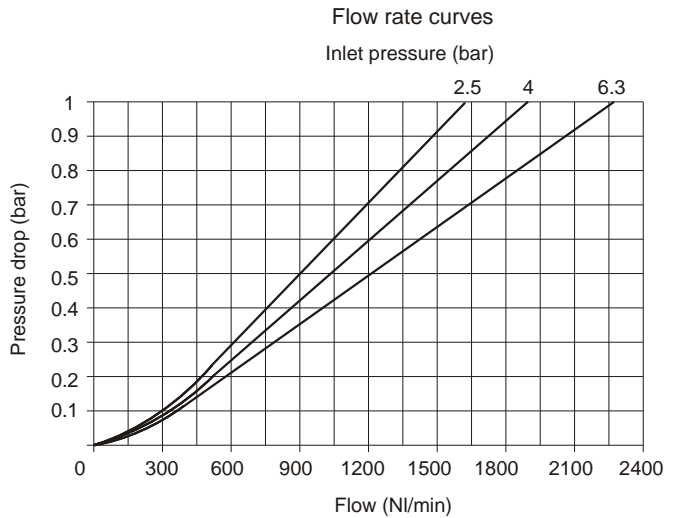

Ordering code

17203

Connections
A = G 1/4"
B = G 3/8"

MA = Minimum oil level indicator N.O.
with plug connector
MC = Minimum oil level indicator N.C.
with plug connector

Note: on MA version the contact is open when the bowl is filled
on MC version the contact is closed when the bowl is filled

Example: **17203A**
Lubricator with G 1/4" connections.