
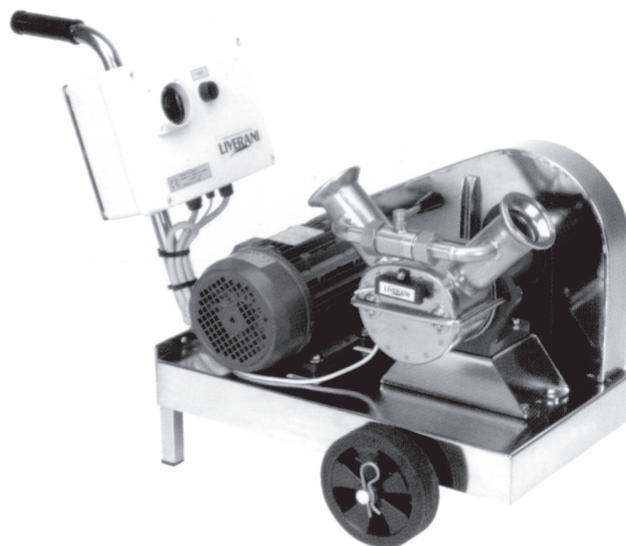


Typ GR

Pompy z silnikiem elektrycznym i przekładnią pasową
mocowane na płycie stalowej







Pompy z silnikiem elektrycznym i przekładnią pasową
mocowane na wózku

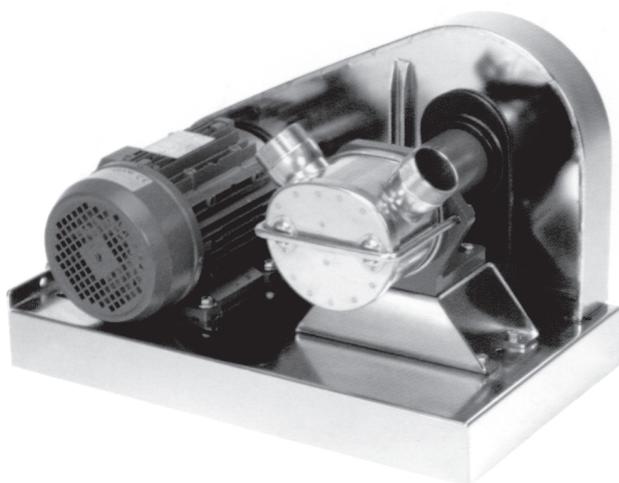

Typ	Ciężar * [kg]	Silnik **		Prędkości	Obroty [1/min.]	Nr	Wydajność Q [l/h] przy wysokości podnoszenia H [m]						
		Typ	[kW]				0	4	8	12	16	18	20
GR MINOR 40	36-38	MF TF	1,49	1	300	2	2400	2150	1800	1400	700	0	
	36-38	MF TF	1,49		470	4	3600	3300	2900	2400	1600	1000	0
	36-38	MF TF	1,49		700	5	5000	4700	4300	3700	3000	2520	1800
	45-46	TF	1,79	2	470	4	3600	3300	2900	2400	1600	1000	0
					1,04	235	1	1800	1600	1300	750	0	
	40-41	TF	2,24	2	700	5	5000	4700	4300	3700	3000	2520	1800
1,49			350		3	2750	2500	2100	1600	800	0		
GR MAJOR 60	42-44	MF TF	1,49	1	470	8	12000	10500	8700	5100	0		
	42-44	TF	1,86			9	18000	15000	12000	8400	2500	0	
	51-53	TF	1,79	2	470	8	12000	10500	8700	5100	0		
			1,04		235	6	6300	5100	2700	0			
	44-45	TF	2,24	2	700	9	18000	15000	12000	8400	2500	0	
			1,49		350	7	9000	7800	6000	3700	0		
GR MAXI 80	65-67	TF	4,10	1	470	12	36000	34200	30000	24000	12000	0	
	65-67	TF	4,10		600	13	43800	41400	36000	30000	16000	0	
	93-95	TF	4,10	2	470	12	36000	34200	30000	24000	12000	0	
			2,61		235	10	19200	18000	15000	9600	0		
	93-95	TF	4,10	2	600	13	43800	41400	36000	30000	16000	0	
			2,61		300	11	24600	22200	18900	12000	0		

* na podstawie - na wózku

** MF - jednofazowy, TF - trójfazowy

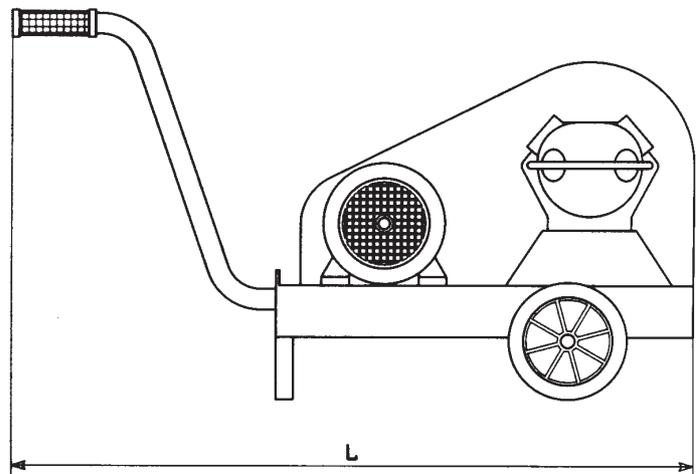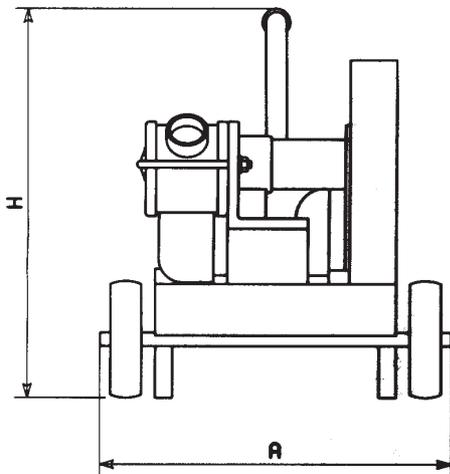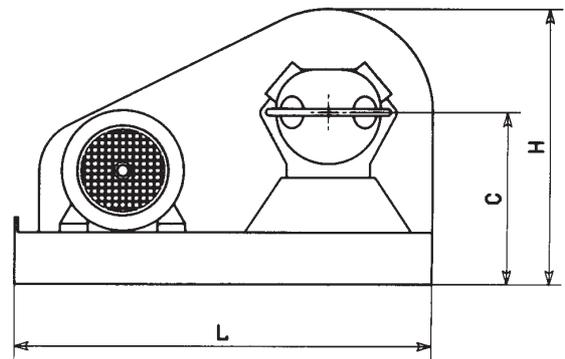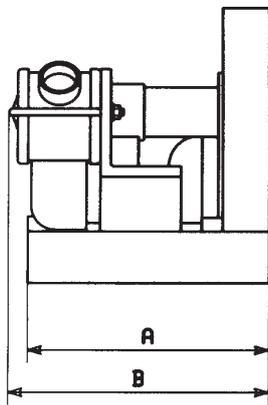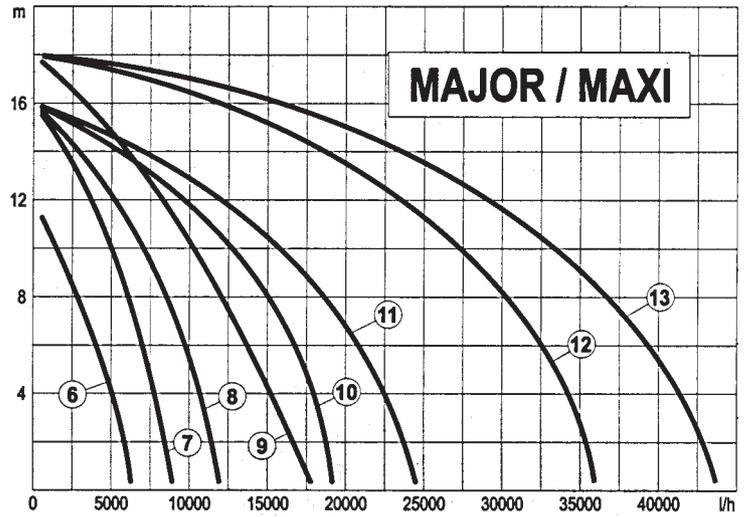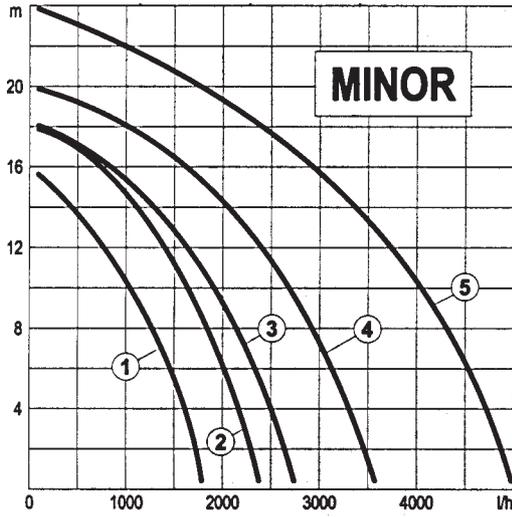

Typ	Prędkości	Na podstawie				Na wózku			
		L	A	B	C	H	L	A	H
GR MINOR 40	1-2	600	350	-	245	400	1000	500	610
GR MAJOR 60	1-2	600	350	375	250	400	1000	500	610
GR MAXI 80	1	600	350	430	265	400	1000	500	610
	2	750	450	510	265	415	1150	620	620