




FEATURES :

- 8 digit compact LCD time totalizer
- Accepts input
 - DC Input model: Potential free Input/3-30 VDC
 - AC Input model: 24-260 VAC
- Battery Life: 5 years
- Reset input: Potential free input
Front reset key
- Range selection
 - 1) 999999.99hrs (Default)
 - 2) 9999.59.59 (HHHH.MM.SS)

PRODUCT CODE


MODEL	Supply Voltage	Back Light
LT920-DC	3-30 VDC	×
LT920-AC	24-260 VAC	×
LT930-DC	3-30 VDC	✓
LT930-AC	24-260 VAC	✓

Dimensions (in mm):

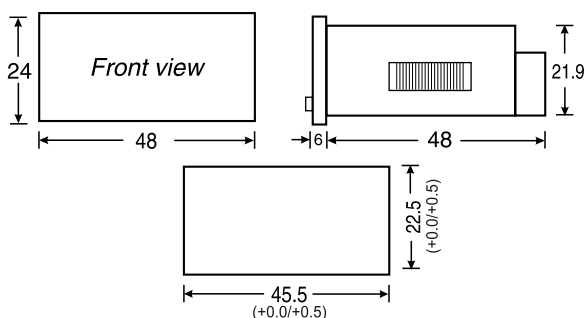


TERMINAL CONNECTIONS

AC Version

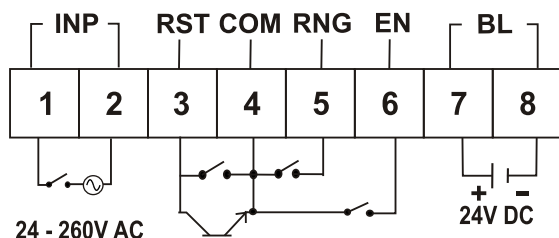

TERMINAL CONNECTIONS

DC Version

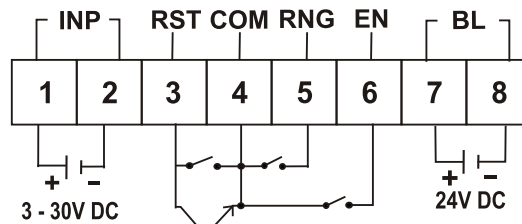

SPECIFICATIONS

Display: LCD, 8 digit, ht. 8.0mm

Battery Life: 5 years

Signal Input :

DC Input model: Potential free Input/3-30 VDC
AC Input model: 24-260 VAC

Counting Direction: Up

Range Selection by using front key:

- 1) Front key enable (Short 6 & 4)
- 2) 9999.59.59 (HHHH.MM.SS) (Short 4 & 5)
- 3) 999999.99hrs (Default) (Remove shorting 4 & 5)

Reset input:

Potential free input (shorting terminal 3 & 4)
Front key reset (after shorting terminal 4 & 6)

Housing: Flame retardant plastic

Mounting: Panel mounting

Operating Temperature: 0°C to 50°

Storage: -20°C to 75°C

Humidity: 95% RH

Weight: approx. 60 gms